



CNC-3510-S – 4M SMART IR Dome



Features

- 4 Megapixel 2592x1520 @25fps
- **H.265+** Compression
- **2.8mm** Fixed Lens
- 3D-DNR, **120dB True WDR**, BLC, DSS, HLC, Defog, Smart IR, ROI etc
- uSD Slot up to 128GB
- 0 Lux up to 15m
- **Build-in Mic.** & Mic. In
- POE / 12VC Dual Power
- **Vandal Resistant**
- SMART Functions : Face Detect & Record, Line Crossing, Area Intrusion (Human/Vehicle), Line Crossing Target Counting

SPECIFICATION

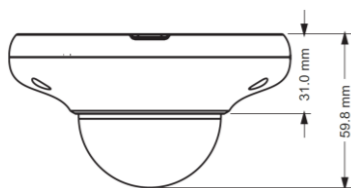

Model	CNC-3510-S
Image Sensor	1/3" progressive scan CMOS Sensor
Resolution	4MP 2592x1520 @25fps (PAL)
Shuttle	1/25s ~ 1/100,000s
Lens	M12 2.8mm Fixed Lens
LEDs	2nos 850nm IR LED Array
Day & Night	Filter Change or TDN (True Day & Night)
Min. Illumination	0.0028 Lux @F1.2, AGC On/IR Off
Network	10/100-BaseT, RJ45
Bit Rate	64 Kbps ~ 8 Mbps
Compression	3-Stream, H.265 / H.264 / MJPEG
W. Environment	-30°~+60°C, <90% Humidity (Non-Condensing)
Power	POE IEEE 802.3af /12VDC, < 6W
Dimension	110mm(φ) x 59.8mm(H), 0.38kg